


PROPER CARE FOR YOUR NEW MAGNETIC SIGNS

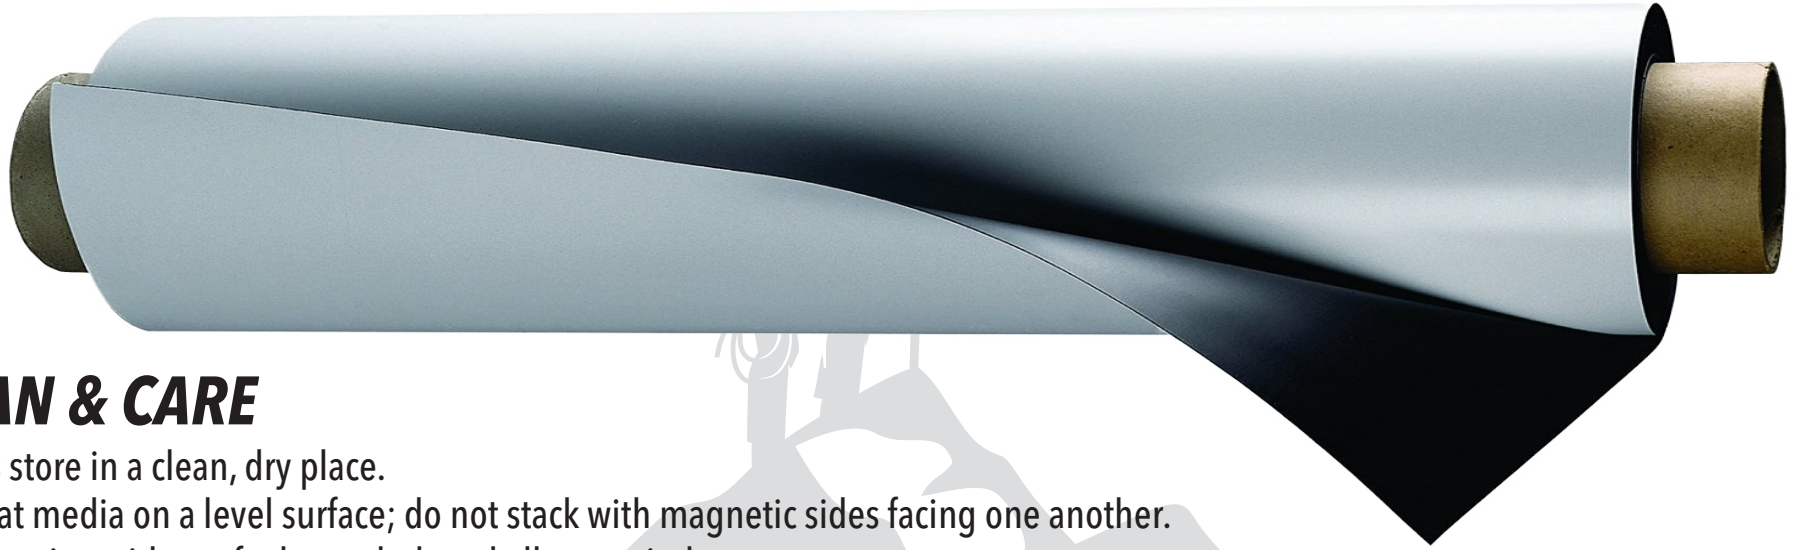

CLEAN & CARE

- Always store in a clean, dry place.
- Store flat media on a level surface; do not stack with magnetic sides facing one another.
- To clean, wipe with a soft, damp cloth and allow to air dry.
- For outdoor applications, remove and clean **regularly** to prevent dirt and moisture buildup. Long-term use on surfaces frequently exposed to sunlight can result in uneven fading.
- For vehicle-mounted signs, remove and clean **daily** for best results.
- Additional clean & care instructions available at www.magnummagnetics.com/customer-resources.

BEST PRACTICES

- Ensure all surface paints, clear coats and waxes are fully cured (hardened) before applying magnets. Allow 2 days for wax to cure before applying magnets.
- To achieve best results, affix the magnet at room temperature of 60deg F or above. Do not use on surfaces exposed to temperatures exceeding 160deg F or below -15deg F.
- Affix to smooth, flat or gently curved metallic surfaces. Ensure the magnet lays flat against the metal surface.
- Do not place over protrusions (molding, decals, etc) or concave areas which will create air pockets that will weaken the magnet's hold.
Note that doors and panels on some vehicles are made of aluminum or plastic and will not hold a magnet.